



pliers and cutters

C.K.VDE Pliers and cutters are German manufactured to the **highest standards** using the **finest quality** materials available. Quality, safety and performance coupled with real innovation ensures your customers will enjoy the **ultimate** in professional tools.




RedLine™ <	contents	05
RedLine™ VDE <	screwdrivers	06
Cable Cutters <	pliers and cutters	14
Ratchet Crimping Pliers <	electrical tools	22
Specialist Pliers <	building, plumbing & decorating tools	30
	general tools & measuring	40
	saws and woodworking	50
	tool systems	56
	power tool accessories	64
	watering systems	86
	retailer information	92
	alphabetical / numerical index	94
	terms and conditions	102



Redline™ from C.K is the standard against which all general pliers are judged. Each plier is manufactured in Germany to the stringent international standards.

All products are display packed on recyclable economic clip hangers, unless otherwise stated.

- 1 Ergonomically designed sleeves for comfort and effortless use.
- 2 Contoured anti-slip shoulders for ease and safety in use
- 3 Dual compound technology features soft non-slip inlays for high working performance
- 4 Matt chrome finish - better presentation and rust protection
- 5 Gas/oil hardened and tempered - balanced performance
- 6 Hot drop forged special alloy steel - strength & durability
- 7 Induction hardened cutting edges - long life, precision cutting
- 8 TPE handles - Thermo Plastic Elastomer

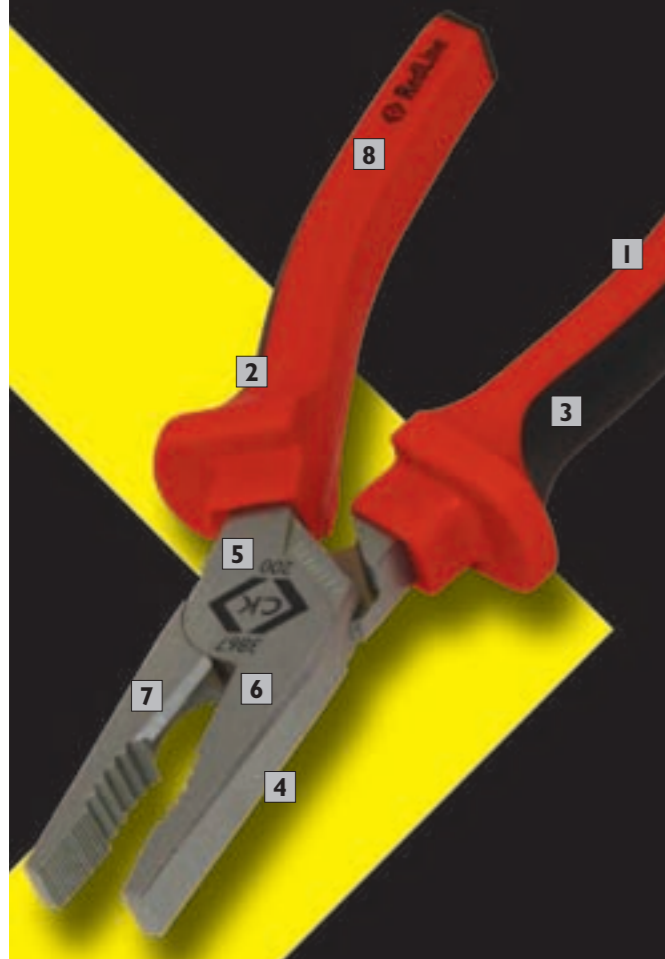

hard wire side cutters 3750

Cutting edges specifically engineered to cut cleanly through cable but also strong enough for med/hard wire. Head and jaw configuration gives high leverage and ease of use.



DIN ISO 5749

item number	size	cutting capacity mm Ø		
		hard	med/hard	soft
T3750 160	160mm	1.6	2.0	>4.0
T3750 180	180mm	2.0	2.3	>4.0

combination pliers 3867

Extra long cutting edges induction hardened for use on med/hard wire, round and flat cable.



DIN ISO 5746

item number	size	cutting capacity mm Ø		
		hard	med/hard	soft
T3867 7	180mm	1.6	2.5	>4.0
T3867 8	200mm	2.0	2.8	>4.0

RedLine™ plier set 3804

Box containing 3 RedLine™ pliers - T3867 180mm Combination Pliers, T3750 160mm Side Cutters, T3906 200mm Snipe Nose Pliers.



item number	description
T3804	RedLine™ plier set


contact customer services on:
Email: sales@cki.uk.com



Our German made professional electrical pliers conform to the highest standards, manufactured in accordance with IEC 60900:2004, fully approved and independently audited by the German VDE Institute. Each plier is individually tested to 10,000V to ensure completely safe working on live equipment up to 1000V. Meets VDE 0682-0201, IEC 60900:2004, ASTM-F 1505-94.

- 1 Ergonomic handles for comfort and safety
- 2 Hardened & precision ground cutting edges for high performance
- 3 The finest materials and processes guarantee strength and durability
- 4 Patress screw shear - damage free screw cutting*
- 5 Anti glare finish*
- 6 Wire folding anvil*
- 7 Wire stripping notches*

* Only applicable to combicutters

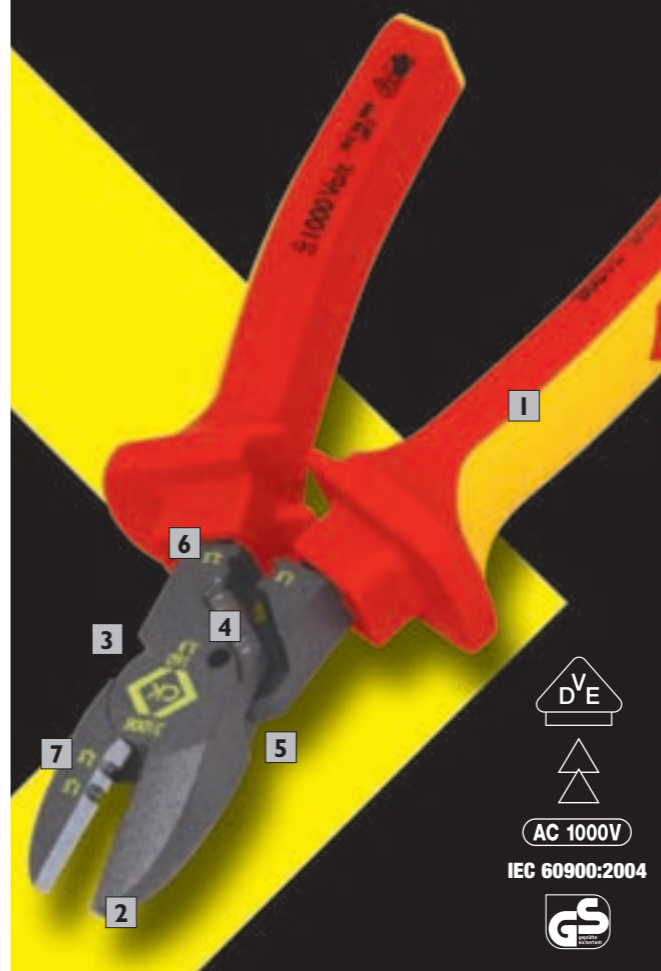

combination pliers 39072

Extra long cutting edges, induction hardened for use on medium and hard wire, round and flat cable.



VDE 0682/201:2005 01, IEC 60900:2004, DIN ISO 5746

item number	size	cutting capacity mm Ø		
		hard	med/hard	soft
431001	165mm	1.6	2.5	>4.0
431002	185mm	1.6	2.5	>4.0
431003	205mm	2.0	2.8	>4.0

snipe nose pliers 39076

Serrated inside jaws with rod gripping hole and cutting edges.



VDE 0682/201:2005 01, IEC 60900:2004, DIN ISO 5745

item number	size	cutting capacity mm Ø		
		hard	med/hard	soft
431013	175mm	1.4	2.0	>4.0
431014	200mm	1.6	2.0	>4.0

stripping pliers 39074

Ideal for repetitive wire stripping, featuring adjustable capacity and spring assisted opening. Wire capacity of 0.3-5.0mm diameter.



VDE 0682/201:2005 01, IEC 60900:2004


item number	size	stripping capacity mm Ø
431012	160mm	0.3 - 5.0

our customers are currently enjoying:

- Same day despatch
- 98% stock availability
- 24 hour online ordering

who on earth would design something like this?

431004

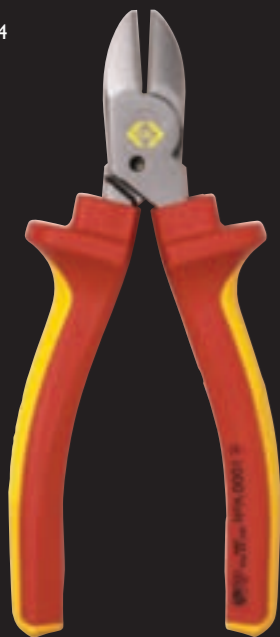

431009



431008



3100

> combicutter 1™


- patress screw shear

> combicutter 2™

- wire stripping notches
- patress screw shear

> combicutter 3™

- wire stripping notches
- wire bending anvil
- patress screw shear

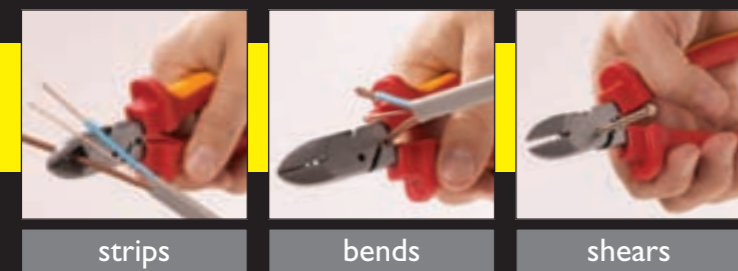

strips

bends

shears

VDE 0682/201:2005 01, IEC 60900:2004, DIN ISO 5749

electricians,
that's who!

it strips

it bends

it shears

> the new C.K combicutter™ range from C.K tools

item number	description	size	cutting capacity mm Ø		
			hard	med/hard	soft
431004	combicutter 1	160mm	1.6	2.5	>4.0
431009	combicutter 2	160mm	1.0	1.5	>4.0
431008	combicutter 3	160mm	1.0	1.5	>4.0

wire stripping side cutters

39075

Side cutters featuring wire stripping notches for 1.5mm sq and 2.5mm sq wire.



VDE 0682/201:2005 01, IEC 60900:2004, DIN ISO 5749

item number	size	cutting capacity mm Ø		
		hard	med/hard	soft
431019	160mm	1.6	2.5	>4.0

side cutters

39075

Head design gives high leverage and easy, clean cutting.



VDE 0682/201:2005 01, IEC 60900:2004, DIN ISO 5749

item number	size	cutting capacity mm Ø		
		hard	med/hard	soft
431017	160mm	1.6	2.5	>4.0
431005	180mm	1.8	2.3	>4.0

side cutters heavy duty

39073

Heavy duty design with higher cutting capacity and extra leverage for superior cutting performance.



VDE 0682/201:2005 01, IEC 60900:2004, DIN ISO 5749

item number	size	cutting capacity mm Ø		
		hard	med/hard	soft
431006	175mm	2.0	2.5	>4.0
431007	200mm	2.5	3.0	>4.0

bent nose pliers

39070

45° bent nose with serrated inside jaws, rod gripping hole and cutting edges.



VDE 0682/201:2005 01, IEC 60900:2004, DIN ISO 5745

item number	size	cutting capacity mm Ø		
		hard	med/hard	soft
431015	200mm	1.6	2.5	>4.0

cable cutter heavy duty

3906

Compact, one handed cable cutter suitable for copper or Aluminium wire, cuts cleanly and effortlessly.



431030

431031

VDE 0682/201:2005 01, IEC 60900:2004

item number	size	cutting capacity mm Ø	
		soft wire	
431030	165mm	16	
431031	210mm	25.0	

C.K crimping pliers are especially designed for Electricians who require a high quality crimping tool which can be relied on for long term, safe and precise crimping of connections.

Ratchet crimping pliers are manufactured from high quality carbon steel alloy with comfortable grips and feature:

- Deadlock system and precision polished dies with ground dies for constant and precise crimping
- Guaranteed for up to 30,000 crimps
- Quick release lever
- Pressure adjustment
- High compression pressure
- 100% tested for correct sizing



ratchet crimping pliers for ferrules

3678

For end sleeve ferrules.



item number	size	capacity mm² Ø / AWG	
430018	190mm	0.14 - 2.5	26 - 14

ratchet crimping pliers for ferrules

3679

For boot lace ferrules.



item number	size	capacity mm ² Ø / AWG
430029	190mm	0.25 - 6.0 / 20 - 10

ratchet crimping pliers insulated terminals

3680

For insulated terminals: green, red and blue.



item number	size	capacity mm ² Ø / AWG
430019	190mm	0.25 - 2.5 / 24 - 14

ratchet crimping pliers

3681

4P2C, 4P4C, 6P4C (RJ11), 6P6C (RJ12), 8P8C (RJ45) and 6P6C/Offset (Dec) – Cuts, strips & crimps all types without change of die. Built in stripper on front, cutter on reverse. Guide for precise stripping and quick release lever/screw. Patented design.




item number	size	description
430020	200mm	ratchet crimping pliers

ratchet crimping pliers insulated terminals

3682

For insulated terminals: red, blue and yellow.

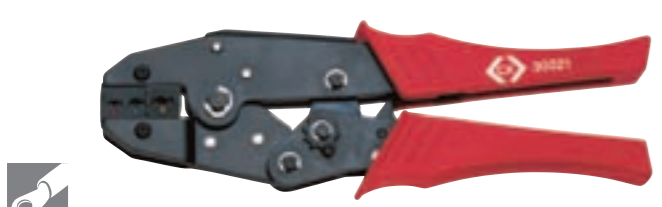

item number	size	capacity mm ² Ø / AWG
430021	220mm	0.5 - 6.0 / 20 - 10

ratchet crimping pliers for ferrules

3683

For insulated wire ferrules.



item number	size	capacity mm ² Ø / AWG
430022	230mm	10 - 25 / 8 - 3

ratchet crimping pliers non-insulated terminals

3697

High quality carbon alloy steel for durability. High compression pressure for secure crimping. Deadlock system for safe and precise crimping. Quick release lever and pressure adjustment for ease of use.



item number	size	capacity mm ² Ø / AWG
430025	230mm	1.5 - 10 / 16 - 8

ratchet crimping pliers COAX – BNC, TNC

3698

For: 58, 59, 62, 8X, 140, 141, 174, 210, 223, 303, 400.



item number	size	description
430026	230mm	ratchet crimping pliers

ratchet crimping pliers modular plugs

3852

For modular plugs 8P8C (RJ-45) 6P6C (RJ-12) and 6P4C (RJ-11). High quality carbon alloy steel construction, cuts strips and crimps without die changes. High compression pressure, deadlocking system, quick release lever and pressure adjustment, offer the control to ensure repeatable perfect results.



item number	size	description
430028	250mm	ratchet crimping pliers

crimping pliers for cable links

3645

High alloy carbon steel, drop forged for long life. Matt chrome plated for corrosion resistance. Contoured grips with anti-slip horns for comfort and safety.



item number	size	capacity mm ² Ø / AWG
430005	145mm	0.25 - 2.5 / 23 - 13

crimping pliers for cable links

3646

High Alloy carbon steel, drop forged for long life. Matt chrome plated for corrosion resistance. Contoured grips with anti-slip horns for comfort and safety.




item number	size	capacity mm ² Ø / AWG
430006	220mm	0.5 - 16 / 20 - 5

ratchet cable cutter

3677

A compact heavy duty cutter with ratchet mechanism for effortlessly cutting cable up to 32mm, featuring high quality chrome molybdenum profiled steel blade for easy cutting of hard drawn copper, aluminium cable or 200 pair communications cable. Full ratcheting cycle for easy use, integral locking mechanism and impact resistant anti slip handles for safety. Not designed for use on steel or ACSR cable.

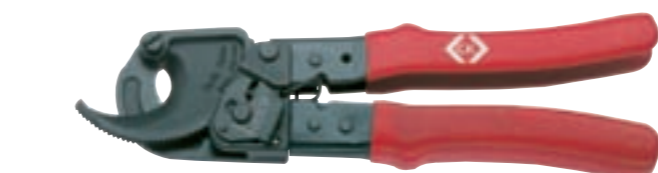


item number	size	cutting capacity mm Ø
430007	190mm	32.0

cable cutter

3963

Hot drop forged steel cable cutters with induction hardened, razor sharp cutting edges, designed specifically for cutting and stripping Aluminium, copper and plastic sheathed cables.

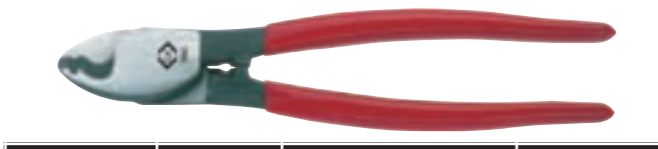


item number	size	cutting capacity Ø
T3963	210mm	11mm
T3963 240	240mm	13mm

heavy duty top cutters

3987

Manufactured from hot drop forged steel with induction hardened cutting edges. Black lacquered with red comfort PVC handles. Heavy duty pattern. Display packed.

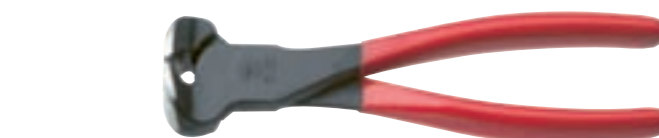

item number	size	capacity
T3987A 7	180mm	2.5mm

top cutters

3988

Manufactured from drop forged steel, oil hardened and tempered. Cutting edges induction hardened to approximately 60HRC for cutting hard or medium hard wire, including soft-annealed tin wire used for fixing steel reinforcing rods. Black polished head and comfort grips. Display packed.



item number	size	cutting capacity mm Ø
T3988 200	200mm	2.8 3.5 4.0

pincers

4108

Manufactured from hot drop forged high grade special tool steel for the highest requirements in trade and industry. Precise cutting edges with low wear factor. Polished jaw surfaces and square shoulder. Black lacquered with red comfort PVC handles. Display packed.



item number	size	cutting capacity mm Ø
T4108A 07	180mm	2
T4108A 08	200mm	2

fencing pliers

3866

Original German pattern. Heavy duty, multi-purpose tool. High grade steel with polished head and red PVC handles. Hammers and draw staples, strains, twists and splices wire. Two shearing cutters for wire up to 5mm^{PL16} Ø. Display packed.



item number	size	description
T3866	270mm	fencing pliers